



Kreis

Ideal solution for landscape areas
Structured with LED light source
Luminous flux: from 2100 lm up to 3250 lm
Color temperature: 3000K, 4000K
Symmetrical optimized light distribution
CRI > 80
Corrosion resistant die-cast aluminum housing
Color: standard HM1 to HM5, optional RAL codes
IP66, IK08
Safety class: standard CLASS I, optional CLASS II
Control system optional: DALI
Operating temperature: -30°C - +55°C
Complies with European Standards EN 60598 and CE certified





CE IK08 IP66

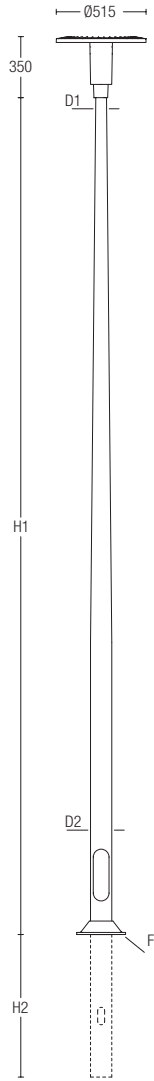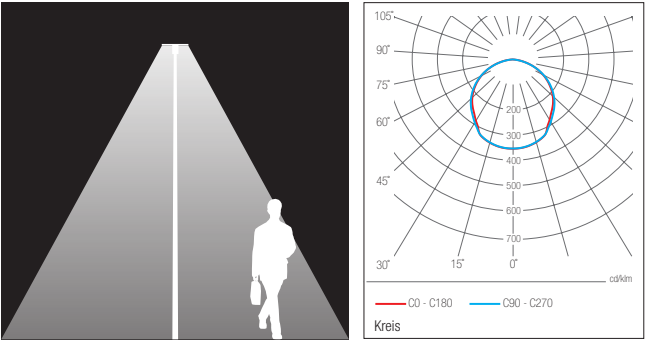

LUMINAIRE

CODE	DESCRIPTION	POWER	LUMEN	COLOR TEMPERATURE
LL2031.511	Kreis	50W	2100lm - 3250lm	3000K / 4000K

POLES

CODE	DESCRIPTION	H1	H2	D1	D2	ANCHORAGE	FLANGE COVER	CUT-OUT
PAFK.005.040	Aluminum Conical Pole Flanged	4000	-	Ø60	Ø114	90BJ002	C1C2B	51
PABK.005.040	Aluminum Conical Pole Buried	4000	800	Ø60	Ø114	-	-	51

